

Jetmaster

Fireplaces Australia



Reliability | Innovation | Service | Quality





Heatilator is proudly manufactured and assembled in Washington State, USA. In choosing a Heatilator appliance, you have our assurance of commitment to quality, durability, and performance.

Heatilator's research and development facility then employs the world's most advanced technology to achieve the optimum operation of their slow combustion fireplaces. Yet, being old-fashioned when it comes to craftsmanship. Each unit is meticulously fabricated and surfaces are

hand-finished for lasting beauty and enjoyment.

We wish you and your family many years of enjoyment in the warmth and comfort of your slow combustion fireplace. Thank you for choosing Heatilator.

WS18 WOOD-BURNING STOVE

- Clean Burning 1.3 grams/kg emissions
- 85% Heating Efficiency
- Up to 210 sqm heat capacity
- Complies with relevant Australian Standards 4012/4013 & 2918.

OVERALL DIMENSIONS

Height	Width	Depth
737	635	674

Note: All dimensions in millimeters



WS22 WOOD-BURNING STOVE

- Clean Burning 1.2 grams/kg emissions
- 82% Heating Efficiency
- Up to 280 sqm heat capacity
- Optional fan available
- Complies with relevant Australia Standards 4012/4013 & 2918.

OVERALL DIMENSIONS

Height	Width	Depth
864	661	781

Note: All dimensions in millimeters



WS18 WOOD-BURNING INSERT

- Clean Burning 1 grams/kg emissions
- 77% Heating Efficiency
- Up to 210 sqm heat capacity
- Comes with fan as standard.
- Complies with relevant Australia Standards 4012/4013 & 2918.

OVERALL DIMENSIONS

Height	Width	Depth
547	601	407


STANDARD FASCIA

Height	Width
788	1093

Note: All dimensions in millimeters




Parallel Positioning

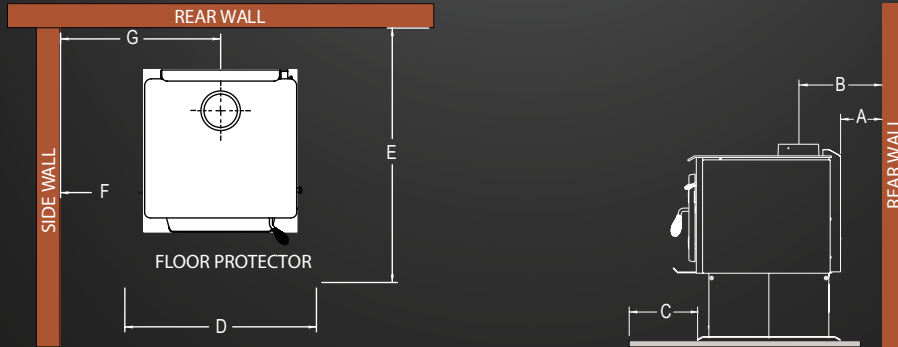

	DESCRIPTION Pioneer Double Flue Mounted Shield Universal Shield be Fitted	WS18 With Flue Shield Fitted (mm)	WS22 With Flue Shield Fitted (mm)
A	Min. Clearance from back of unit to rear wall	175	300
B	Min. clearance from center of spigot to rear wall	345	468
C	Min. distance from front of base to floor protector front	300	300
D	Min. floor protector front width	800	800
E	Min. distance from rear wall to front of floor protector	1055	1291
F	Min. distance from unit side to side wall	300	400
G	Min. clearance from center of spigot to side wall	618	730

Corner Positioning (45°)

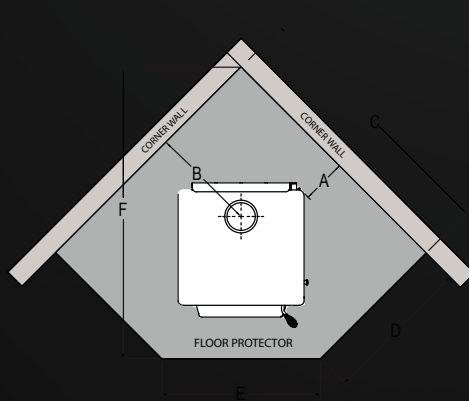

	DESCRIPTION Pioneer Double Flue Mounted Shield Universal Shield be Fitted	WS18 With Flue Shield Fitted (mm)	WS22 With Flue Shield Fitted (mm)
A	Min. clearance from firebox corner to corner walls	155	75
B	Min. distance from center of spigot to corner walls	470	393
C	Min. distance from corner wall to floor protector front	1219	1217
D	Min. floor protector projection from corner wall	730	731
E	Min. floor protector front width	692	688
F	Min. overall floor protector depth	1379	1377



Reliability | Innovation | Service | Quality

For the entire Jetmaster range, visit your nearest showroom
jetmaster.com.au | 1300 538 62